

# acecube

versatile

## Model (ACV-4500L / 1188G)

The AceCube Versatile ACV-4500L/1188G is designed for the safe and secure transporting and storage of various industrial lubricants and hazardous liquids worldwide.

ACV-4500L / 1188G is approved to UN31AY in US and Canada only. It is also approved to UL142/ULC S-601.



### Specifications

	Metric	US	Imperial
Capacity	4500 Litres	1188 Gallons	990 Gallons
Length	3111 mm	122 7/16"	122 7/16"
Width	2108 mm	82 15/16"	82 15/16"
Height	1296 mm	51"	51"
Outer Tank Thickness	3 mm	1/16"	1/16"
Inner Tank Thickness	4 mm	2/16"	2/16"
Weight, Tare	1500 kg	3306 lbs, 15oz	3306 lbs, 15oz
Weight, Laden	5910 kg	13029 lbs, 5oz	13029 lbs, 5oz
Safe Fuel Fill Level	4275 Litres	1129 Gallons	940 Gallons


### Approvals and Certifications

#### UK & Europe

- ✓ Trade Mark Certificate Europe
- ✓ Trade Mark Certificate UK
- ✓ Designed for Lifting when Full
- ✓ (IBC) Intermediate Bulk Containment
- ✓ PPG2 & PPG26
- ✓ UL142
- ✓ ULC S601 Complaint Design
- ✓ Patent no: GB2502198
- ✓ BS799

#### USA & Canada

- ✓ (IBC) Intermediate Bulk Containment
- ✓ TSSA B1390 DN - 2006 (Optional)
- ✓ Lifting when Full Certified
- ✓ UL 142 Complaint Design
- ✓ ULC S601 Complaint Design
- ✓ Patent no: GB2502198

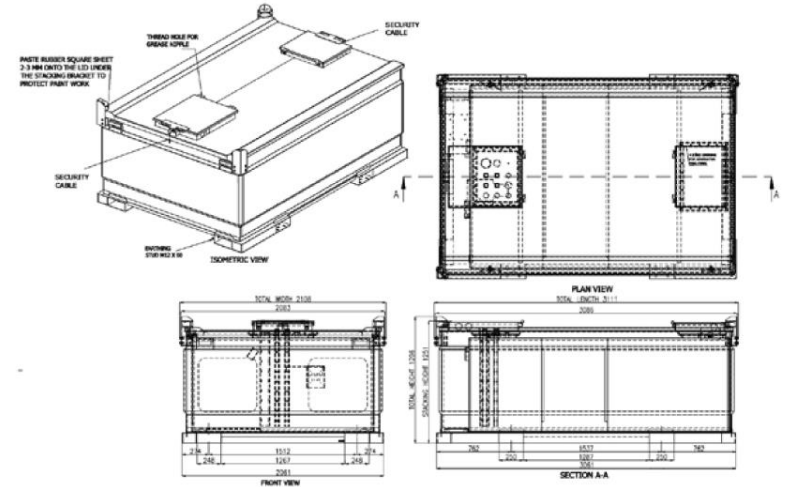

The range has an extra large equipment compartment area that can house a variety of accessories.




DISPENSING NOZZLE VARIATIONS



HOSES WITH ISO QUICK RELEASE COUPLERS



UP TO 10M OR 32FT RETRACTABLE HOSE REELS

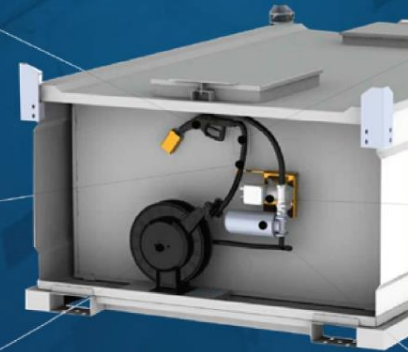

DIGITAL FLOW METERS



ENGINE DRIVEN OR ELECTRIC PUMPS



IN LINE PARTIAL SEPARATION FILTERS