

acecube

versatile

Model (ACV-3000L / 792G)

The AceCube Versatile ACV-3000L/792G is designed for the safe and secure transporting and storage of various industrial lubricants and hazardous liquids worldwide.



Specifications

	Metric	US	Imperial
Capacity	3000 Litres	792 Gallons	660 Gallons
Length	2613 mm	102 13/16"	102 13/16"
Width	1685 mm	66 5/16"	66 5/16"
Height	1296 mm	51"	51"
Outer Tank Thickness	3 mm	1/16"	1/16"
Inner Tank Thickness	4 mm	2/16"	2/16"
Weight, Tare	1125 kg	2480 lbs, 3oz	2480 lbs, 3oz
Weight, Laden	3955 kg	8719 lbs, 5oz	8719 lbs, 5oz
Safe Fuel Fill Level	2850 Litres	753 Gallons	627 Gallons


Approvals and Certifications

UK & Europe

- ✓ Trade Mark Certificate Europe
- ✓ Trade Mark Certificate UK
- ✓ (IBC) Intermediate Bulk Containment
- ✓ UN 31 A/Y
- ✓ Adhering to ADR regulations
- ✓ Lifting when Full Certified
- ✓ PPG2 & PPG26
- ✓ Vibration Tested
- ✓ UL142
- ✓ ULCS601-14
- ✓ Patent no: GB2502198

USA & Canada

- ✓ (IBC) Intermediate Bulk Containment
- ✓ TSSA B1390 ON - 2006 (Optional)
- ✓ UN 31 A/Y
- ✓ DOT USA
- ✓ DOT Canada
- ✓ Lifting when Full Certified
- ✓ Vibration Tested
- ✓ UL142
- ✓ ULCS601-14
- ✓ Patent no: GB2502198

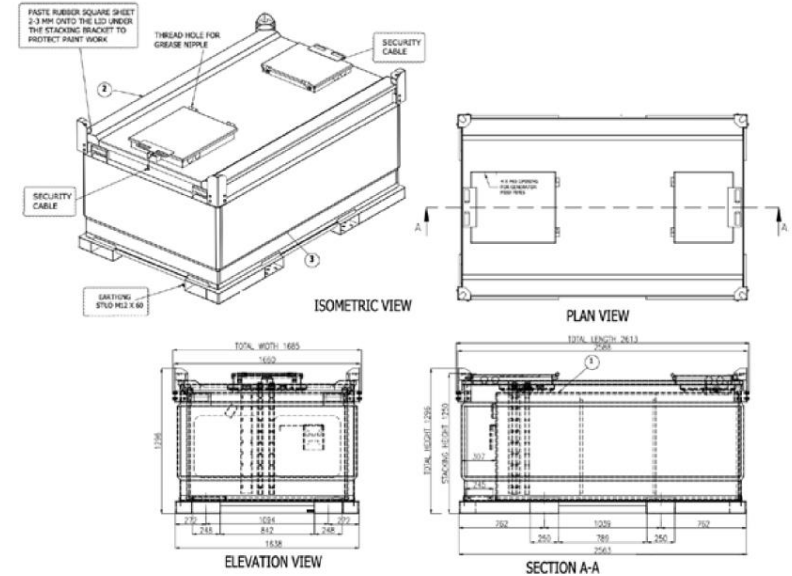

The range has an extra large equipment compartment area that can house a variety of accessories.



DISPENSING NOZZLE VARIATIONS



DIGITAL FLOW METERS



HOSES WITH ISO QUICK RELEASE COUPLERS



ENGINE DRIVEN OR ELECTRIC PUMPS



UP TO 10M OR 32FT RETRACTABLE HOSE REELS



IN LINE PARTIAL SEPARATION FILTERS